



## PORTABLE RADIAL STACKERS


For generations, Masaba has designed and built the most durable, reliable conveyors on the market. Masaba Portable Radial Stackers provide a quick and hassle-free transition from travel position to being fully operational.



---

[WWW.MASABAINC.COM](http://WWW.MASABAINC.COM) | 877-627-2220

---

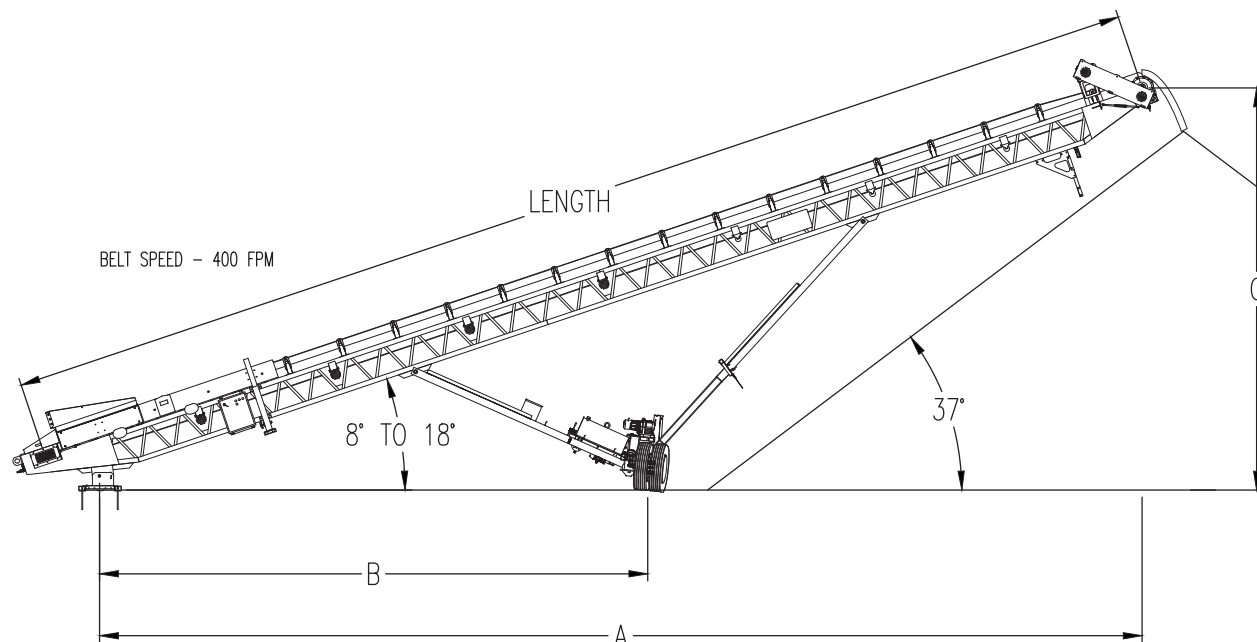

Belt Width	30"				36"				42"			
Max Capacity	500 TPH				750 TPH				1000 TPH			
Length	60'	80'	100'	125'	60'	80'	100'	125'	60'	80'	100'	125'
Conveyor HP	25	30	30	40	30	40	40	50	50	60	60	75
Dimension "A"	57'-4"	77'-8"	93'-4"	117'-9"	57'-4"	77'-8"	93'-4"	117'-9"	57'-4"	77'-8"	93'-4"	117'-9"
Dimension "B"	30'-3"	40'-11"	48'-10"	61'-10"	30'-3"	40'-11"	48'-10"	61'-10"	30'-3"	40'-11"	48'-10"	61'-10"
Dimension "C"	20'-6"	27'-5"	33'-9"	41'-1"	20'-6"	27'-5"	33'-9"	41'-1"	20'-6"	27'-5"	33'-9"	41'-1"

Stockpile Capacity	60'	80'	100'	125'
Pile Height	20'6"	27'6"	32'6"	39'5"
Arc Radius of Pile	58'	77'	96'6"	120'7"
Base Diameter of Pile	54'	73'	86'	103'4"
Conical Pile Capacity	783 Tons	1,918 Tons	3,146 Tons	5,714 Tons
	580 C.Y.	1,421 C.Y.	2,331 C.Y.	4,232 C.Y.
Total Capacity including ends @ 45° Arc	2,052 Tons	3,321 Tons	5,859 Tons	14,955 Tons
	1,516 C.Y.	2,452 C.Y.	4,324 C.Y.	11,077 C.Y.
Total Capacity including ends @ 90° Arc	4,946 Tons	7,993 Tons	14,068 Tons	24,475 Tons
	3,671 C.Y.	5,921 C.Y.	10,421 C.Y.	18,129 C.Y.
Total Capacity including ends @ 180° Arc	8,456 Tons	13,766 Tons	24,386 Tons	43,515 Tons
	6,273 C.Y.	10,215 C.Y.	18,099 C.Y.	32,233 C.Y.

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because Masaba, Inc. may use in its catalog and literature, field photographs of its products that may have been modified by the owners, products furnished by Masaba, Inc. may not necessarily be as illustrated therein. Additionally, continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of Masaba, Inc. are subject to the provisions of its standard warranty. Masaba, Inc. does not guarantee or represent that its products meet any federal, state or local statutes, codes, ordinances, rules, standards, or other regulations, including OSHA and MSHA, covering safety, pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the owner and will be dependent upon the areas in and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and safety equipment is often dependent upon the area in and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs, and other safety devices should be installed by the user, wherever appropriate, before operating the products.