



Portable Bin Feeder

Portable 3 Bin Feed Plant

Main Frame and Chassis

- Triple Axle Chassis
- Heavy Duty Wide Flange Beam Frame
- (12) 11R x 22.5 radial tires
- Brakes
- Lights
- Mudflaps

(3) 24" Belt Feeder

- **7.5 hp**
- 8" Channel Main Frame
- Dodge #3 Reducer
- CEMA C Idlers
- 3 Ply Belting with Mechanical Splice
- Belt Scraper

30" Collection Conveyor

- **15 hp**
- 10" Channel Main Frame
- Dodge TXT#5 Reducer
- **13" Discharge Height**
- CEMA C Idlers
- Flat Carrier Idlers
- 3 Ply Belting with Mechanical Splice
- Belt Scraper

(3) Hoppers

- 12' x 10'
- Volume: **10.5 cubic yards**
- Manual Metering Gates
- Baffles
- 1/4" Mild Steel Plate
- Full length skirting on feeder belts
- Square Tube Supports to Chassis

Features

- (1) Coat 2 part Urethane Primer
- (1) Coat 2 part Urethane Paint
- Steel-shot blasted
- (2) Owner's manual for start-up and maintenance

Options


- Switchgear
 - NEMA 4 Enclosure
 - Variable Frequency Drive
- (6) Lift Only Hydraulic Jacks with 12V Power Unit
- Vulcanized Belt Splice
- Bulkheads

STRENGTH
YOU
CAN **DEPEND** On!

MASABA Portable 3 Bin Feed Plant

BENEFITS OF MASABA

Our Portable 3 Bin Feed Plants are built with the same strength and toughness you expect from all of our equipment. The Masaba Strong Tri Axle Chassis (1) makes this plant completely portable and easily maneuverable around your operation and the 30" Collection Conveyor (2) with 3-Ply Belting will make for easy, reliable unloading of your bins. The three 1/4" Mild Steel Hoppers (3) are built to last and are secured to the chassis with square steel tubing (4).

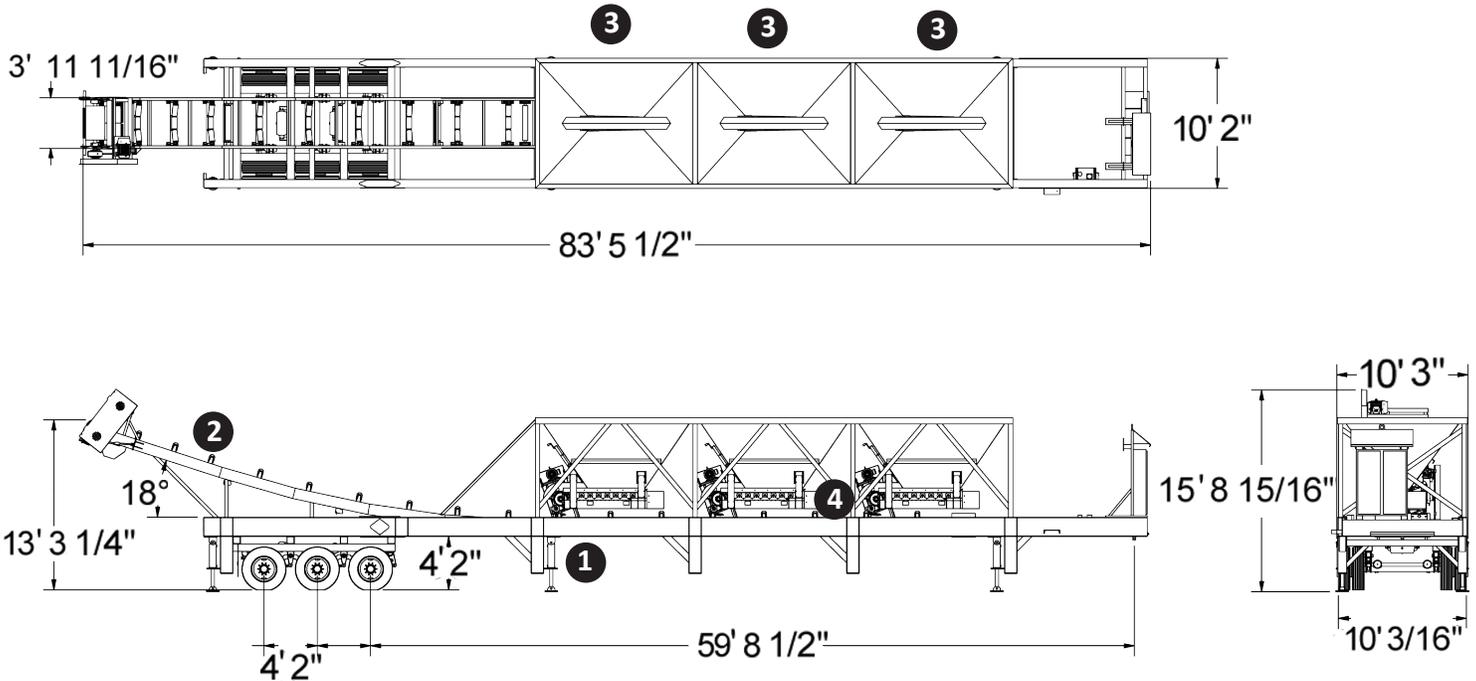

King Pin Weight: 19,280 lbs
Axle Weight: 30,040 lbs

NOTE: Listed weights are not exact. Actual weights will vary based on axle configuration, options, etc.



Wide Flange Beam Chassis



Steel Square Tubing Supports



1/4" Mild Steel Plate Hoppers



MASABAinc.com
1-877-627-2220
info@MASABAinc.com

REVISION December 2013

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because MASABA, Inc. may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by MASABA, Inc. may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of MASABA, Inc. are subject to the provisions of its standard warranty. MASABA, Inc. does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.