


MASABA

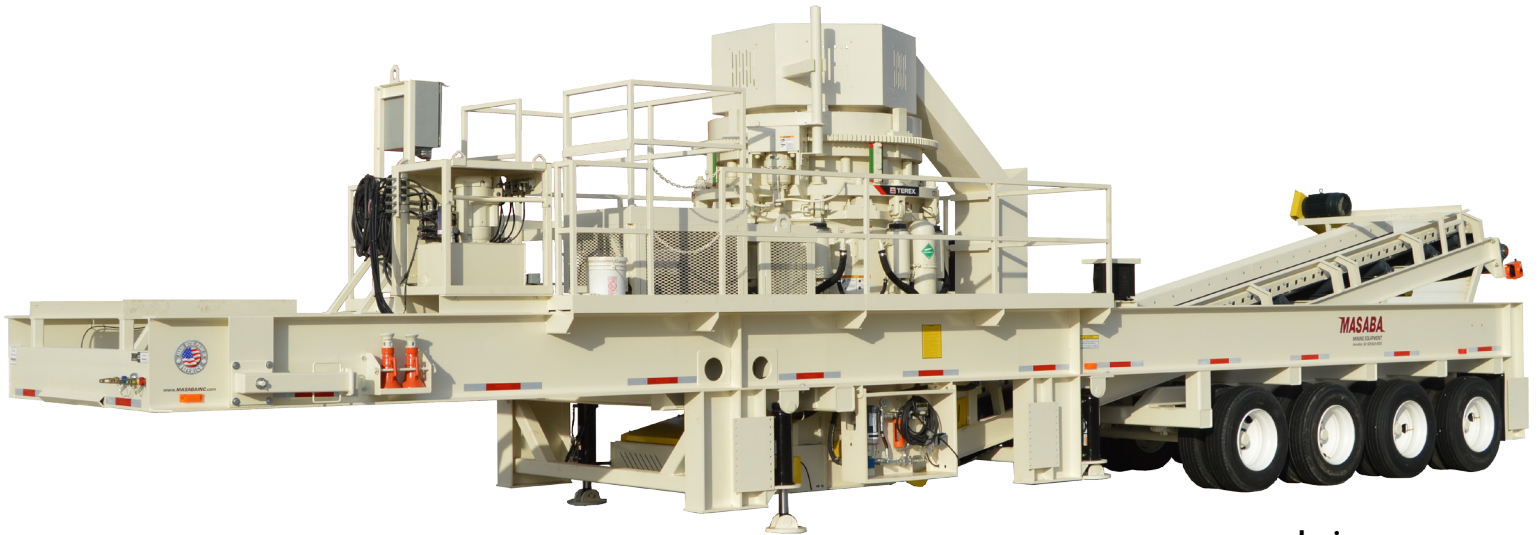

www.masabainc.com

Cone Crushing Plant

Portable MVP 450X Crushing Plant

Main Frame and Chassis

- Various Axle Configurations
- Wide Flange Beam Main Frame
- Upper/Lower Access Platforms
 - Diamond-Plated Catwalk
 - Access Ladder
 - Railings
- 11R x 22.5 radial tires
- Brakes
- Lights

48" Rear Discharge Conveyor

- **20 hp**
- Axle End Discharge
- Hydraulic Raise/Lower
- Dodge #5 Gear Reducer
- CEMA C Idlers
- 3 Ply Belting with Mechanical Splice
- Full Length Flashing
- Belt Scraper

Crushing System

- (2) **200 hp 1200 rpm** Crusher Motors
- Undercrusher Hopper
 - Rock Ledge
 - 3/8" AR Steel
- 1/4" Mild Steel Cone Hopper
 - Hinged Lid and Slotted Windows
- Cone Overflow Chute

Features

- (4) Hydraulic Lifting Jacks
- (2) Swing Down Front Cribbing Jacks
- (1) Coat 2 part Urethane Primer
- (1) Coat 2 part Urethane Paint
- Steel-shot blasted
- Owner's manual for start-up and maintenance

Options

- Switchgear
 - NEMA 4 Enclosure
- Upgrade to (4) Masaba 70,000 lb Brute Run On Hydraulic Jacks
- Vulcanized Splice
- Toolbox


STRENGTH
YOU CAN **DEPEND** On!

MASABA

1617 317th Street - PO Box 345, Vermillion, South Dakota 57069 USA, www.masabainc.com, 877-627-2220 or 605-624-9555

BENEFITS OF MASABA

Maşaba Portable Crushing Plants are designed and built to be the toughest plants available. The Maşaba Portable MVP 450X Plant is built on a Heavy Duty Wide Flange Beam Chassis (1) and features Upper and Lower Access Platforms (2) complete with diamond plate decking, kickplates, and double 2" handrails. The 48" Discharge Conveyor (3) comes complete with impact idlers and 3 ply belting and discharges product from under the crusher and the 1/4" Cone Overflow Chute (4).

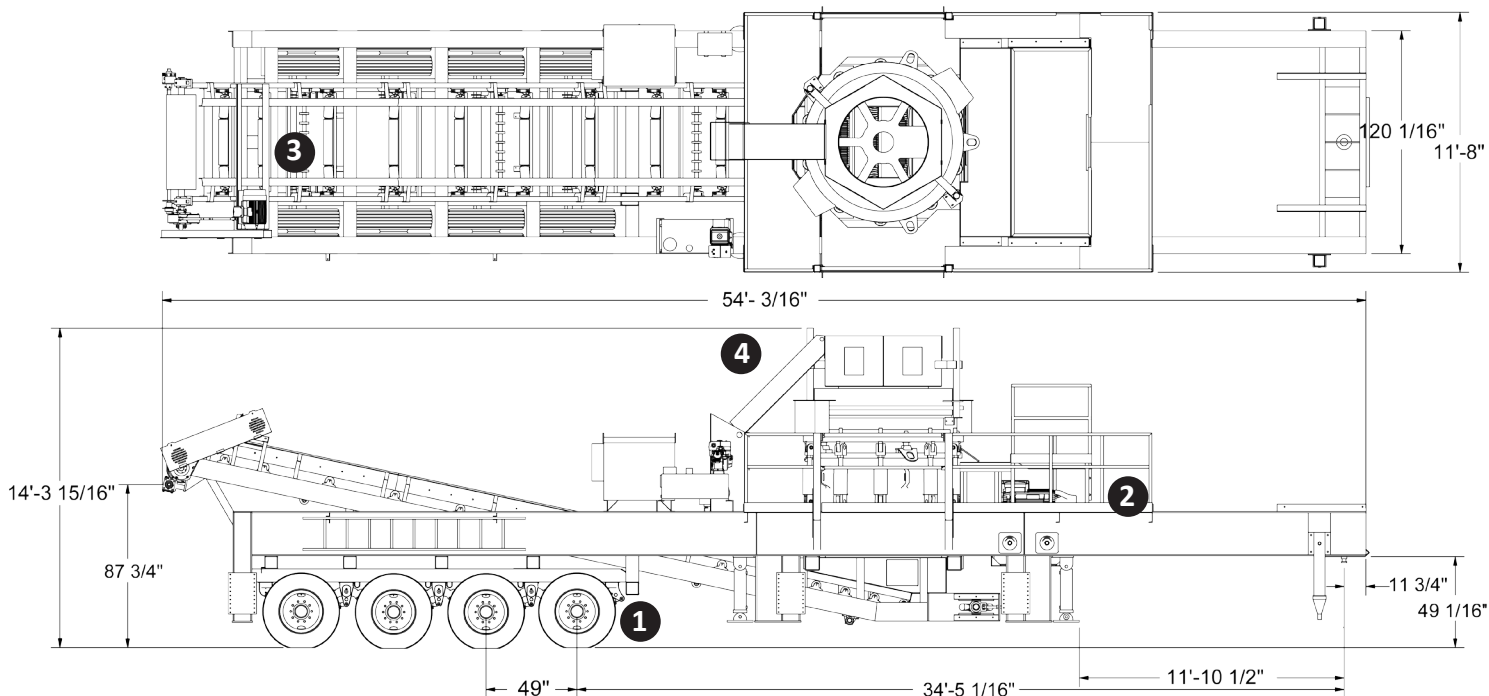

King Pin Weight: 48,100 lbs
Axle Weight: 68,300 lbs

NOTE: Listed weights are not exact. Actual weights will vary based on axle configuration, options, etc.



48" Discharge Conveyor
Hydraulic Raise/Lower



Wide Flange Beam Chassis



Diamond Plate Platforms
Double 2" Handrails and Kickplates

The MASABA logo is displayed in a bold, italicized, sans-serif font. The letters are white and set against a dark background. The logo is positioned at the bottom right of the page, with a diagonal line separating it from the rest of the content.

MASABainc.com
1-877-627-2220
info@MASABainc.com

REVISION December 2013

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because MASABA, Inc. may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by MASABA, Inc. may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of MASABA, Inc. are subject to the provisions of its standard warranty. MASABA, Inc. does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.