



PORTABLE GRIZZLY FEEDERS


Masaba Grizzly Feeder's are designed with self-cleaning grizzly bars, guaranteed to keep material flowing and eliminate buildup, handling material surges from upstream equipment to ensure proper feeding.



WWW.MASABAINC.COM | 877-627-2220

Standard Feeder Sizes:

- » 8x16 w/Inclined Belt Feeder
- » 9x16 w/Inclined Belt Feeder
- » 10x16 w/Discharge Conveyor
- » Custom options available

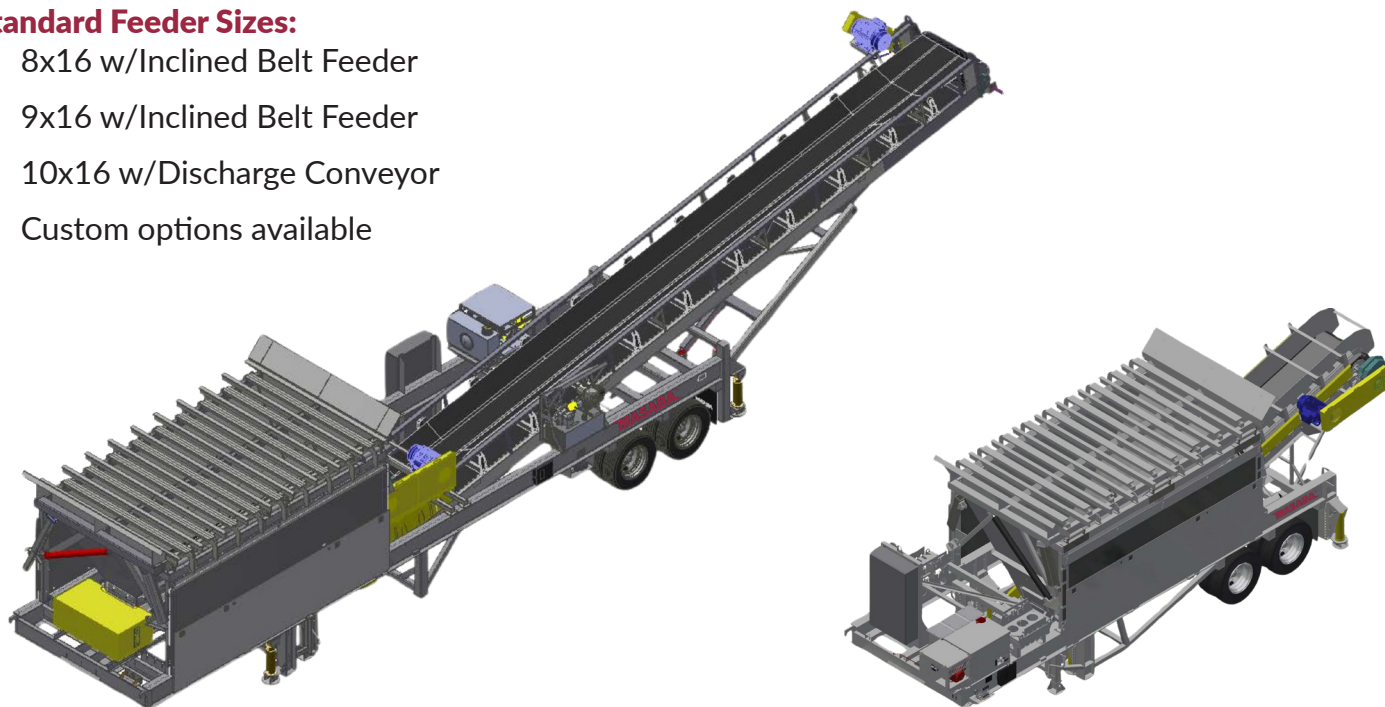

Grizzly Top Selection	Spacing
Manual Reversible w/ Static Openings	6" Openings
Self-Relieving w/Optional Openings	6" or 8" Openings
Self-Relieving w/Adjustable Openings	4", 6", or 8" Openings

Size	8x16	9x16	10x16
Hopper Dimensions (Inside)	7' 4" x 16'	8' 4" x 16'	9' 4" x 16'
Volume (Cubic Yards)	9.3	18.5	14
Belts	36" Belt Feeder	42" Belt Feeder	42" Belt Feeder 48" Discharge Conveyor
Capacity (TPH @ 100 PCF)	Up to 825		Up to 1050
Max. Discharge Height	7' 6"	7' 11"	17' 10"

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because Masaba, Inc. may use in its catalog and literature, field photographs of its products that may have been modified by the owners, products furnished by Masaba, Inc. may not necessarily be as illustrated therein. Additionally, continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of Masaba, Inc. are subject to the provisions of its standard warranty. Masaba, Inc. does not guarantee or represent that its products meet any federal, state or local statutes, codes, ordinances, rules, standards, or other regulations, including OSHA and MSHA, covering safety, pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the owner and will be dependent upon the areas in and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and safety equipment is often dependent upon the area in and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs, and other safety devices should be installed by the user, wherever appropriate, before operating the products.