
MASABA®




FINE MATERIAL WASHERS

Wash, classify, and dewater fine materials with Masaba Fine Material Washers, designed to deliver efficient, precise material sorting by removing silt, clay, and other unwanted lightweight materials.

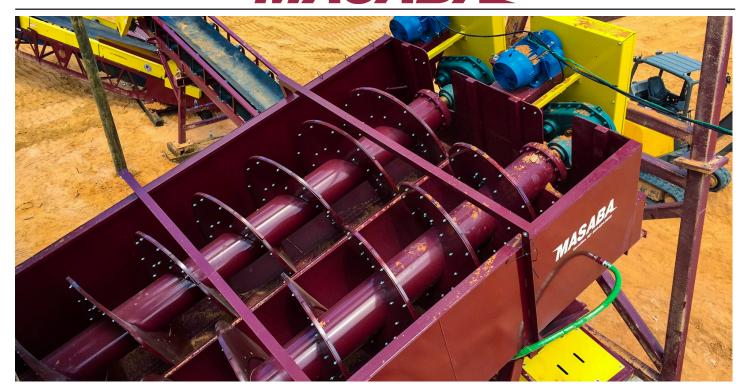


WWW.MASABAINC.COM | 877-627-2220

TMASABA®

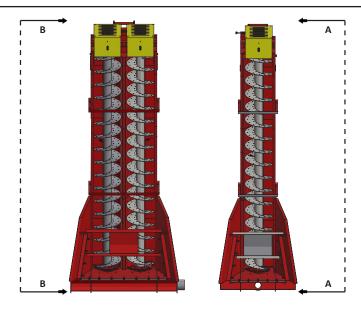

Screw Diameter	36"		44'	"	54"		
Configuration	Single	Twin	Single	Twin	Single	Twin	
Capacity (TPH)	100	200	175	350	275	550	
RPM	21		17	'	14		

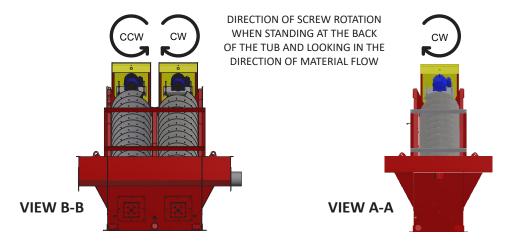

Water Flowing Over Weirs Per Minute (G.P.M.)												
Screw Size	Water Supply Requirements	1/4"	1/2"	3/4"	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/4"	2 1/2"	
36" Single	40-360	84	238	438	674	942	1238	1561	1907	2275	2665	
44" Single	60-740	119	335	616	948	1325	1742	2195	2682	3200	3747	
54" Single	60-950	123	348	639	983	1375	1808	2278	2784	3321	3890	
36" Twin	105-620	100	282	518	796	1113	1463	1844	2253	2689	3149	
44" Twin	125-1,400	137	388	712	1096	1532	2013	2537	3100	3698	4332	
54" Twin	125-1,700	145	411	754	1160	1622	2132	2687	3283	3917	4588	

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because Masaba, Inc. may use in its catalog and literature, field photographs of its products that may have been modified by the owners, products furnished by Masaba, Inc. may not necessarily be as illustrated therein. Additionally, continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of Masaba, Inc. are subject to the provisions of its standard warranty. Masaba, Inc. does not guarentee or represent that its products meet any federal, state or local statutes, codes, ordinances, rules, standards, or other regulations, including OSHA and MSHA, covering safety, pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the owner and will be dependent upon the areas in and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and safety equipment is often dependent upon the area in and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs, and other safety devices should be installed by the user, wherever appropriate, before operating the products.