




LOW-PROFILE DRIVE-OVER TRUCK UNLOADERS

Reduce labor, fuel, and maintenance costs by minimizing the need for multiple material handling with Masaba Truck Unloaders.

Whether you require stationary or fully portable, we have the perfect solution for you.



WWW.MASABAINC.COM | 877-627-2220

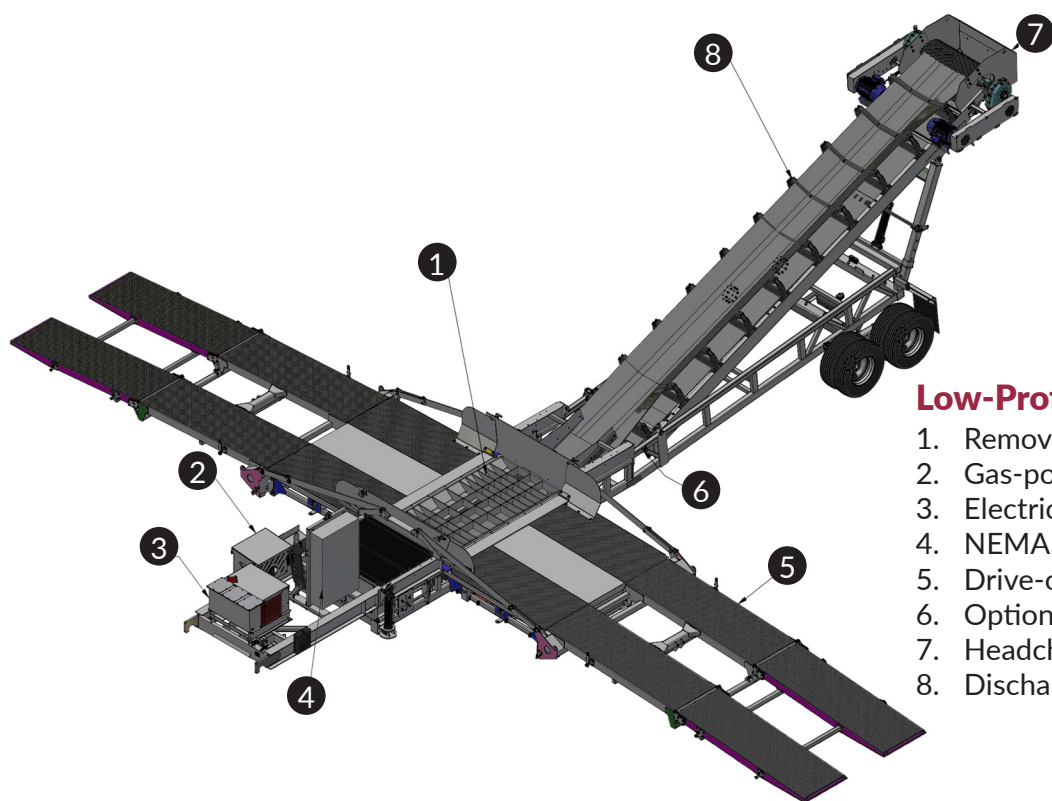

Low-Profile Truck Unloader

1. Removeable drive-over grate
2. Gas-powered hydraulic power unit
3. Electric auxillary hydraulic pump
4. NEMA 4 control panel
5. Drive-over ramps
6. Optional intraflo central grease system
7. Headchute with bolt-in liners
8. Discharge conveyor

Model	48"	72"
Operational Dimensions		
Grate	10' x 5'	10' x 6.8'
Ramp Width	10'1"	10'1"
Maximum Discharge Height	11'4"	12'1"
Minimum Discharge Height	7'10"	8'1"
Conveyor Length	45'	56'
Capacity (based on 100 PCF material)	1,000 TPH	1,500 TPH
Belt Speed	250 FPM	300 FPM
(2) 1800 RPM Motor HP	25 HP	40 HP
Travel Dimensions		
Length	64'1"	71'4"
Width	11'10"	11'11"
Height	13'1"	13'2"
Axle Weight	24,300 lbs	34,680 lbs
Kingpin Weight	15,100 lbs	18,000 lbs

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because Masaba, Inc. may use in its catalog and literature, field photographs of its products that may have been modified by the owners, products furnished by Masaba, Inc. may not necessarily be as illustrated therein. Additionally, continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of Masaba, Inc. are subject to the provisions of its standard warranty. Masaba, Inc. does not guarantee or represent that its products meet any federal, state or local statutes, codes, ordinances, rules, standards, or other regulations, including OSHA and MSHA, covering safety, pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the owner and will be dependent upon the areas in and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and safety equipment is often dependent upon the area in and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs, and other safety devices should be installed by the user, wherever appropriate, before operating the products.