



Features

- 1 Self-Cleaning Hydraulic Ramps
- 2 Hydraulically Adjustable Discharge Height
- 3 Gen Set - Optional
- 4 Heavy Duty Steel Ramps to Grade
- 5 NEMA 4 Control Panel
- 6 20 hp Electric Auxillary Hydraulic Pump
- 7 Removable Drive Over Grizzly Bars
- 8 Class II Dual Drives

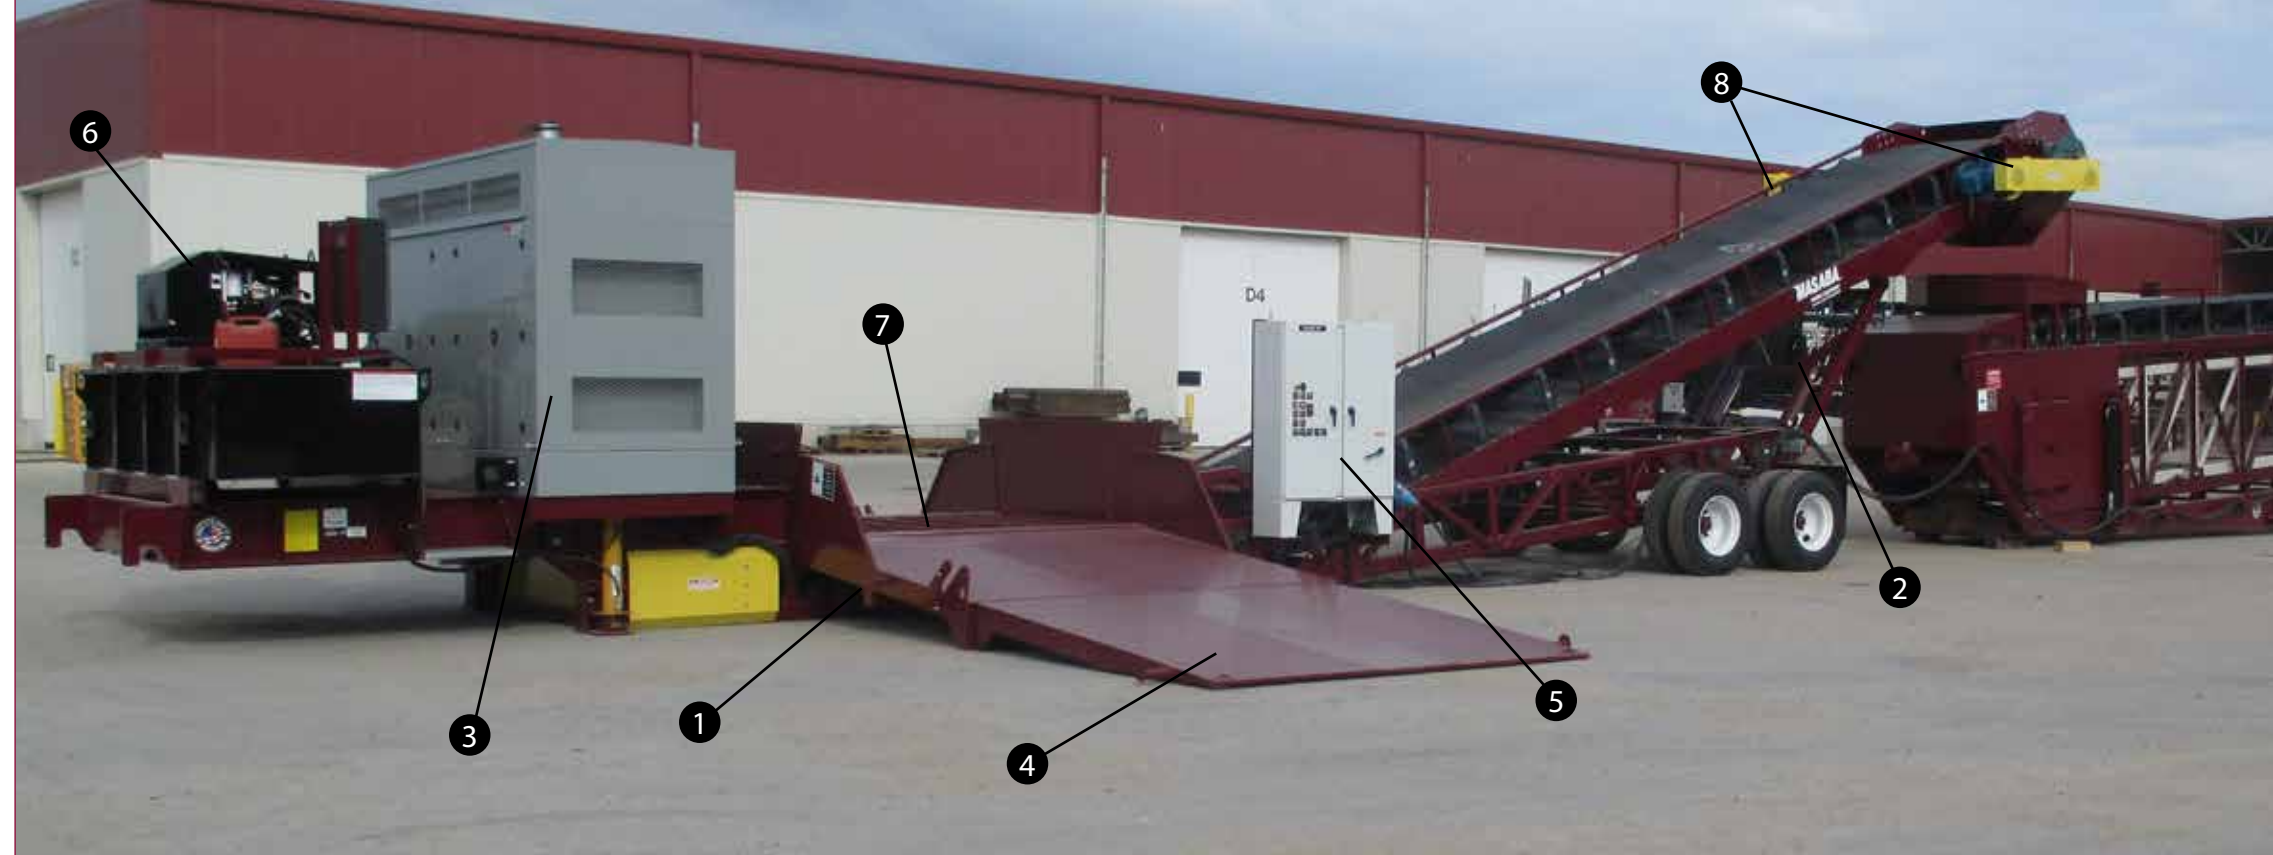

Discharge Conveyor

- Hydraulically adjustable height
- Designed to feed any telescoping stacker and a variety of other equipment
- Discharge hood with 1/4" AR steel liner
- Dual Class II drives

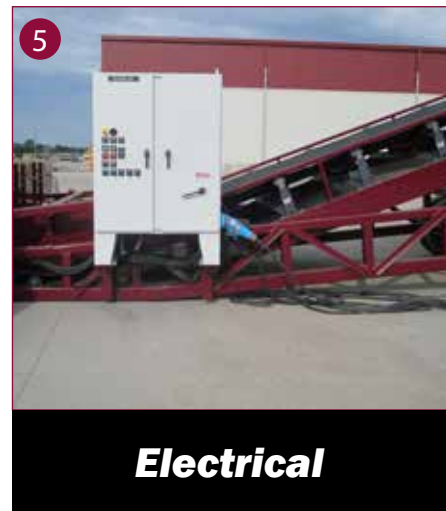

Electrical

- 480 v/3 ph/60 hz enclosed panel
- 575 v also available
- Includes main disconnect, circuit breaker and push button on/off switches with soft start
- 100' lead cord
- Wireless Remote Control included




Hydraulic Ramps

- Self-cleaning hydraulic ramps
- Heavy Duty steel ramps to grade
- No earthen ramps required
- Fast set up time
- Designed for ease of maintenance

BENEFITS OF MASABA LOW PROFILE TRUCK UNLOADERS

- Savings in labor, fuel, maintenance
- Reduce multiple handling of material
- Eliminate traffic congestion of multiple trucks and loaders
- Hydraulically folding, self-cleaning ramps
- Wireless Remote Control

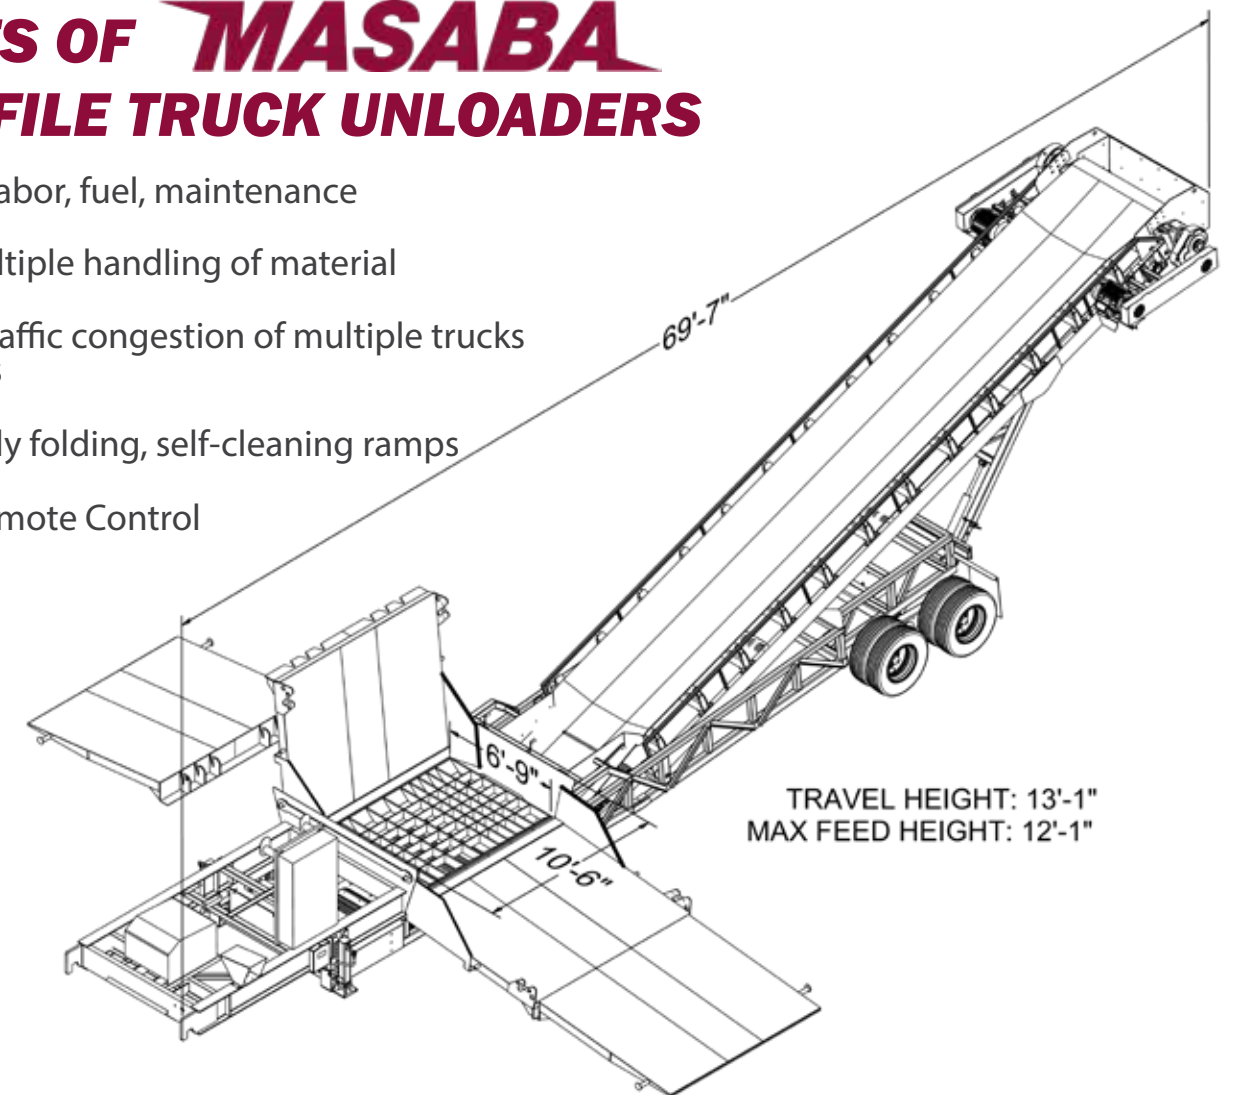

MASABA

5 Year Complete Structural
2 Year Complete Equipment
WARRANTY



MASABA



Custom 72" Low Profile Truck Unloader

LOW PROFILE TRUCK UNLOADERS



MODEL	48"	72"
OPERATIONAL DIMENSIONS		
Capacity (based on 100 PCF material)	1,000 TPH	1,500 TPH
Conveyor Length	45'	56'
Ramp Width	10' 1"	10' 1"
Max. Discharge Height	11' 4"	12' 1"
Min. Discharge Height	7' 10"	8' 1"
TRAVEL DIMENSIONS		
Length	64' 1"	71' 4"
Height	13' 1"	13' 2"
Width	11' 10"	11' 11"
Axle Weight	24,300 lbs	34,680 lbs
Kingpin Weight	15,100 lbs	18,000 lbs

NOTE: Dimensions will vary based on axle configurations, options, etc. All dimensions are subject to change. For dimensions and drawings of specific models, please contact Masaba at 1-877-627-2220.

www.MASABAINC.com