

MASABA



www.masabainc.com

Portable Truck Unloader

Portable 48" Low Profile Truck Unloader

Main Frame and Chassis

- Tandem Axle
- Heavy Duty Steel Tubing Frame
- (8) 11R x 22.5 radial tires
- Brakes
- Lights
- Mudflaps
- Crank Down Landing Jacks

Load Area

- 10' x 5' Heavy Duty Flat Bar Grate
- Self Cleaning Hydraulic Ramps
- 10' x 5' Ramp Bulkhead
 - Heavy Duty Hinges
 - Folds For Road Transport

48" Discharge Conveyor

- Hydraulic Raise and Lower
 - **11'2"** Max Discharge Height
- Dual Head Drive
- **(2) 25 hp 1800 rpm Motors**
- Capacity: **1,000 tph**
 - based on 100 lbs per cu/ft material
 - 1.5 minus
- Belt Speed: **225 fpm**
- 3 Ply Belting with Vulcanized Splice
- Discharge Hood with AR Liners
- Adjustable Flow Control Slide Gate
- Belt Scraper

Features

- (1) Coat 2 part Urethane Paint
- (1) Coat 2 part Urethane Primer
- Steel Shot Blasted
- Appropriate Guarding
- Wireless Remote Control
- (2) Owner's manual for start-up and maintenance

Options

- Switchgear
 - NEMA 4 Enclosure
- Hydraulic Jacks
- Continuous Cycling Hot Climate Hydraulic Protection
- Genset
- Grate Sizes
- Intraflo Autolube System

STRENGTH
YOU
CAN **DEPEND** On!


MASABA

1617 317th Street - PO Box 345, Vermillion, South Dakota 57069 USA, www.masabainc.com, 877-627-2220 or 605-624-9555

MASABA Portable 48" Low Profile Truck Unloader

BENEFITS OF MASABA

Masaba Truck Unloaders are the toughest drive-over truck unloaders on the market. Built with a Heavy Duty Steel Tubing Frame (1), Masaba Truck Unloaders will stand up to rough travel conditions. Hydraulic Ramps (2) allow for easy placement in your operation and remove the need for earthen ramps. The 48" Discharge Conveyor (3) comes with an AR Lined Discharge Hood making the Masaba 72" Truck Unloader perfect for feeding a stacker or other equipment in your spread.

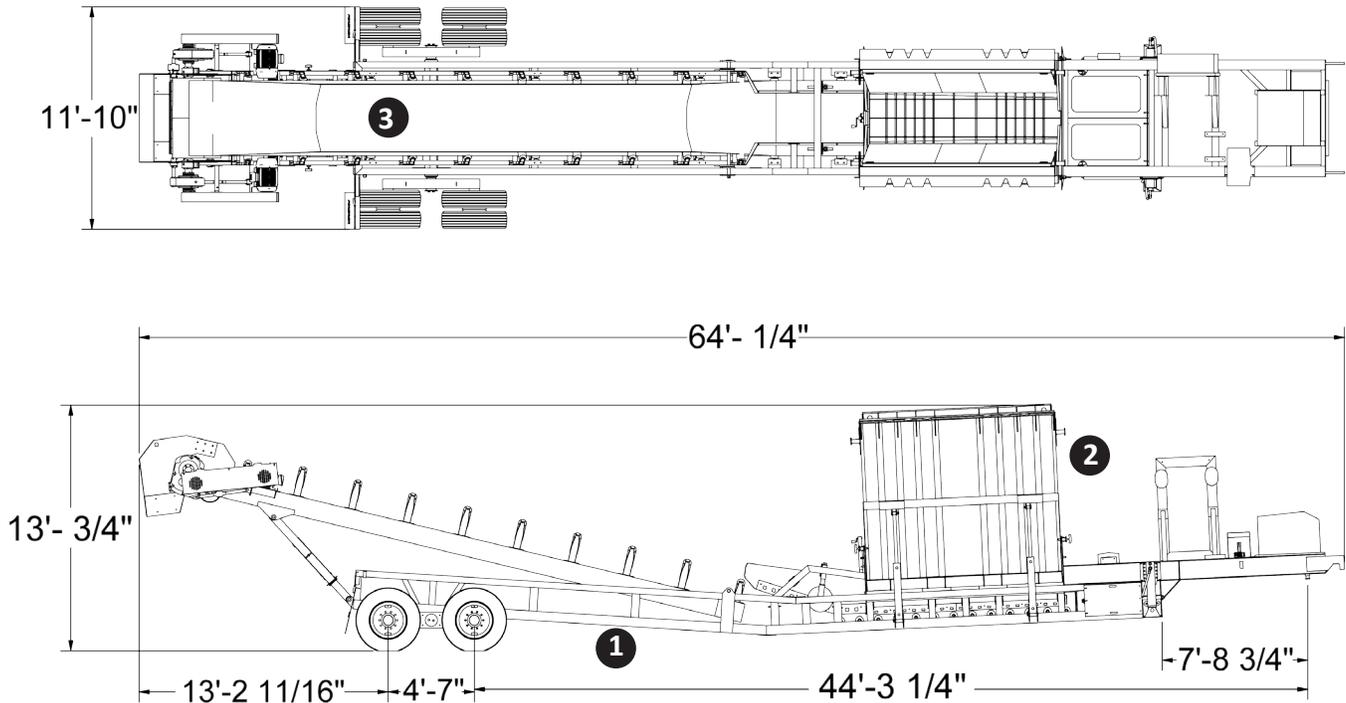

King Pin Weight: 14,440 lbs
Axle Weight: 25,590 lbs

NOTE: Listed weights are not exact. Actual weights will vary based on options



Self Cleaning Hydraulic Ramps



48" Discharge Conveyor with Discharge Hood



48" 3-Ply Belting
Vulcanized Splice



MASABAinc.com
1-877-627-2220
info@MASABAinc.com

REVISION December 2014

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE: Because MASABA, Inc. may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by MASABA, Inc. may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of MASABA, Inc. are subject to the provisions of its standard warranty. MASABA, Inc. does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety pollution, electrical, wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and the use to which the product is put. A safety study should be made by the user of the application, and, if required, additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.